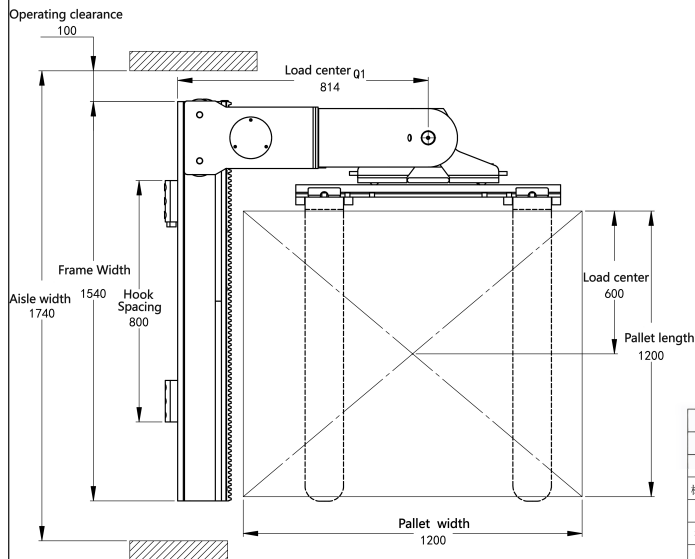


1. Installation Class: ISO 3A / ISO 2A
2. Load Capacity: 1,600 kg;
3. Pallet Dimensions: 1,200 x 1,200 (Length x Width)
4. Load-Off Distance (ET): 185 mm
5. Load Centers: Q1 = 814, Q2 = 600;
6. Horizontal Center of Gravity (HCG): 338 mm
7. Attachment Functions: Fork carriage side shift, 180° fork carriage rotation.
8. The attachment requires 2 external hydraulic lines,
9. Attachment Weight: 642 kg (excluding forks);

							3-Way Stacking Attachment		
标 记	处 数	更改文件号	签 名	年 月 日	图样标记			重量	比例
设 计			标准化		S				1:12
校 对					共 1 张			第 1 张	Model
审 核								版本: A1	
工 艺			批准						